


六角ボディ ナットインサート

HHシリーズ


材質 : 低炭素鋼
表面処理 : 三価クロメート

平頭タイプ

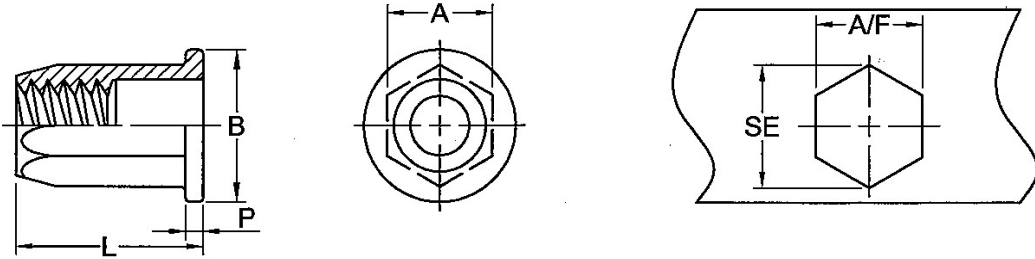

品番	ネジ径	接合板厚	A -0.2	B ±0.3	L ±0.30 (※±1.0)	P ±0.10	SE Min	HEX穴 A/F(+0.2)
HH-LM4	M4X0.7	0.5~2.5	6.0	9.00	11.20	0.80	6.80	6.10
HH-LM5	M5X0.8	0.5~3.0	7.0	10.00	13.00	1.00	8.00	7.10
HH-LM6	M6X1.0	0.5~3.0	9.0	13.00	16.00	1.50	10.30	9.10
HH-LM6L	M6X1.0	3.0~5.0	9.0	13.00	※18.00	1.50	10.35	9.10
HH-LM8	M8X1.25	0.5~3.0	11.0	16.00	18.00	1.50	12.60	11.10
HH-LM8L	M8X1.25	3.0~5.5	11.0	16.00	20.50	1.50	12.65	11.10
HH-LM10	M10X1.50	1.0~4.5	13.0	19.00	24.00	2.00	14.90	13.10
HH-LM10L	M10X1.50	4.0~6.0	13.0	19.00	25.50	2.00	14.95	13.10
HH-LM12	M12X1.75	1.5~5.0	16.0	23.00	27.00	2.00	18.30	16.10

皿頭タイプ

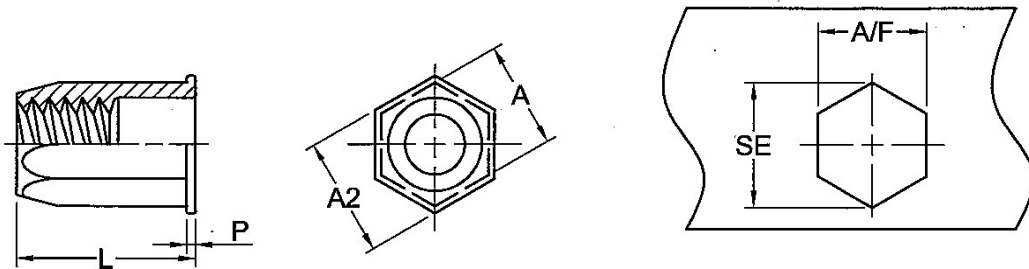

品番	ネジ径	接合板厚	A -0.2	A2 ±0.3	L+0.5/-0.3 ※±0.25 ※※±0.5	P ±0.20	SE Min	HEX穴 A/F(+0.1)
HH-SM4	M4X0.7	0.5~2.5	6.0	7.00	10.00	0.50	6.80	6.10
HH-SM4L	M4X0.7	2.0~4.0	6.0	7.00	※12.20	0.50	6.85	6.10
HH-SM5	M5X0.8	0.5~3.0	7.0	8.00	12.00	0.60	8.00	7.10
HH-SM5L	M5X0.8	2.0~4.5	7.0	8.00	※14.75	0.60	8.05	7.10
HH-SM6	M6X1.0	0.6~3.0	9.0	10.00	15.00	0.60	10.30	9.10
HH-SM6L	M6X1.0	3.0~5.5	9.0	10.00	※※18.00	0.60	10.35	9.10
HH-SM8	M8X1.25	0.7~3.5	11.0	12.00	17.50	0.50	12.60	11.10
HH-SM8L	M8X1.25	3.0~5.5	11.0	12.00	※19.00	0.50	12.65	11.10
HH-SM10	M10X1.50	1.0~4.5	13.0	14.50	23.00	1.00	14.90	13.10
HH-SM10L	M10X1.50	3.0~6.0	13.0	14.50	※25.00	1.00	14.95	13.10
HH-SM12	M12X1.75	1.0~4.0	16.0	18.00	25.00	1.00	18.30	16.10
HH-SM12L	M12X1.75	3.5~6.5	16.0	18.00	※※28.00	1.00	18.30	16.10

☆半六角ボディタイプもございます